


PERMANENT MAGNET VARIABLE FREQUENCY CONSTANT PRESSURE
CENTRIFUGAL PUMP




SCA2-30/SCA3-30

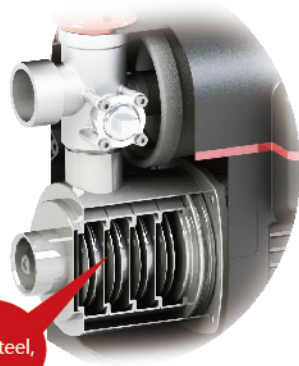


All fluid components
are made of stainless steel,
Safe, hygienic, durable

PERFORMANCE CURVE:

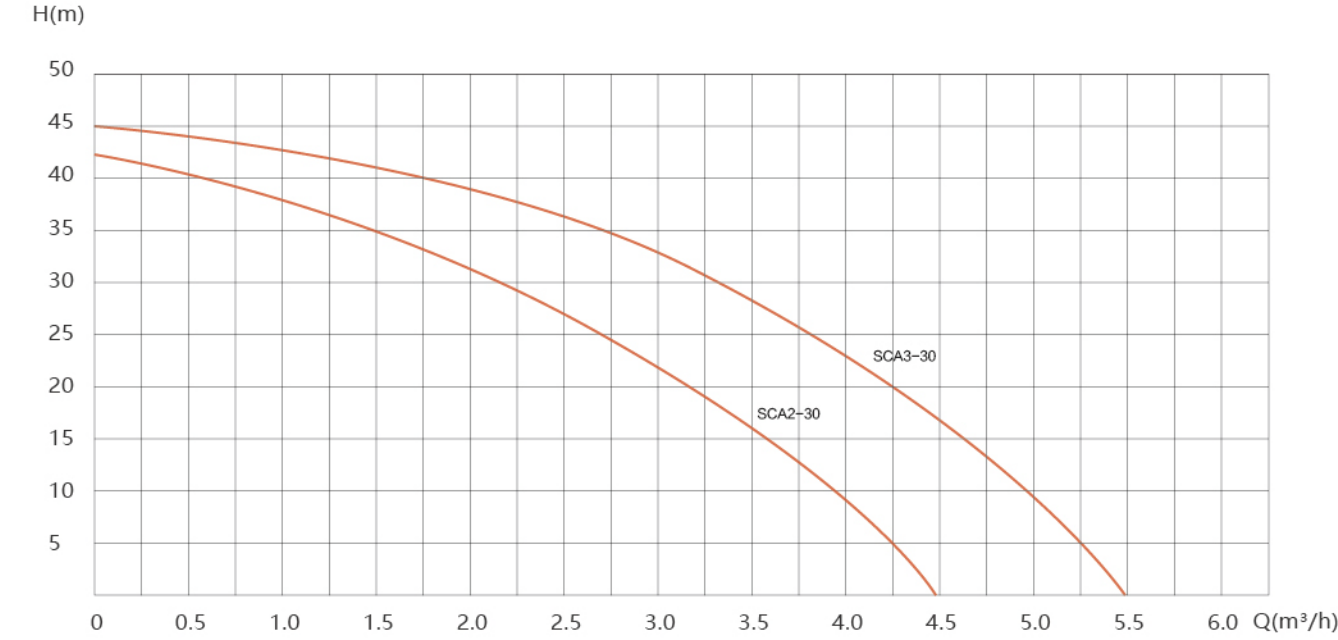

TECHNICAL PARAMETER:

Model	Max.Power (w)	Max.Head (m)	Max.Flow (m³/h)	Max.Speed (r/min)	Voltage (v)	Frequency (Hz)	Inlet/Outlet Size(")
SCA3-30	750	45	5.5	4800	220 ± 20%	50/60	1" /1"
SCA2-30	550	42	4.5	4800	220 ± 20%	50/60	1" /1"

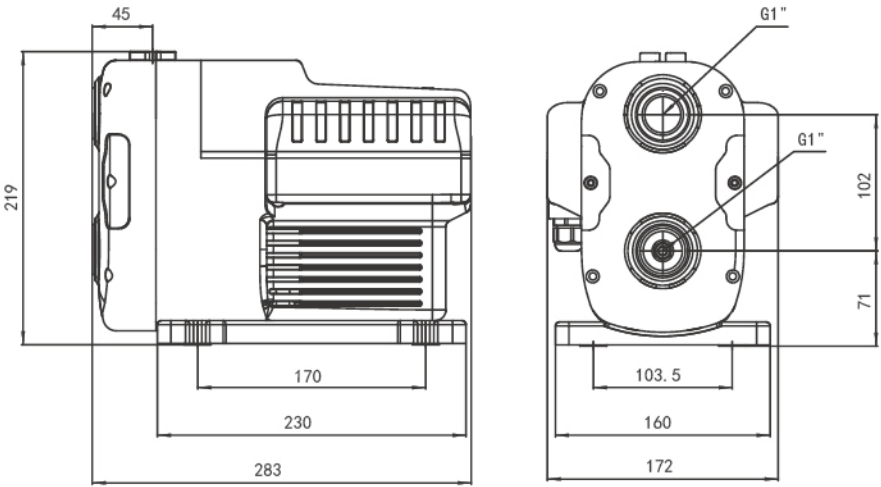

PRODUCT FEATURES:

- A compact figure, with 4 faucets open at the same time, it can maintain a constant pressure of 3kg.
- Energy saving, wide voltage dual frequency use, simple operation, and multiple protections.
- One click pressure regulation, simple and beautiful, with IP54 protection, supporting outdoor use.
- Suitable for water tower pressure boost, hot water pressure boost, whole house pressure boost system, integration. Non- return water structure, designed to eliminate water hammer, equipped with high-quality sensors.

RANGE OF APPLICATION:

It has a wide range of applications in domestic water supply and in industrial buildings, including liquid transportation and circulation pressure boost in the light industry field, as well as home water supply. It is also widely used for cooling and air conditioning systems, single villas, centralized residential buildings, small campuses, schools, small hotels, inns, small office buildings, and other small household and small commercial water supply and pressure boost.